

# Sunmodule<sup>+</sup>® SW 240/245/250/255 poly



Produced in Germany,  
the center for solar technology



TUV Power controlled:  
Lowest measuring tolerance in industry



Sunmodule Plus:  
Positive performance tolerance



25 year linear performance warranty and  
10 year product warranty



SolarWorld AG relies on Germany as its technology location, thereby ensuring sustainable product quality.

The TUV Rheinland Power controlled inspection mark guarantees that the nominal power indicated for a Sunmodule Plus is inspected at regular intervals and thus ensured. The deviation to TUV is maximum 2 percent.

The positive power tolerance guarantees utmost system efficiency. Only modules achieving or exceeding the designated nominal power in performance tests are dispatched. The power tolerance ranges between -0 Wp and +5 Wp.

With its linear performance warranty covering a period of 25 years, SolarWorld guarantees a maximum performance depression of 0.7% p.a., a significant added value compared to the two-phase warranties common in the industry. Therefore, the service certificate offers comprehensive protection for your investment in the long term.

# Sunmodule<sup>+</sup> SW 240/245/250/255 poly

## PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)\*

		SW 240	SW 245	SW 250	SW 255
Maximum power	$P_{max}$	240 Wp	245 Wp	250 Wp	255 Wp
Open circuit voltage	$U_{oc}$	37.2 V	37.5 V	37.6 V	37.8 V
Maximum power point voltage	$U_{mpp}$	30.2 V	30.8 V	30.8 V	31.1 V
Short circuit current	$I_{sc}$	8.44 A	8.49 A	8.64 A	8.73 A
Maximum power point current	$I_{mpp}$	7.96 A	7.96 A	8.12 A	8.20 A


Measuring tolerance ( $P_{max}$ ) traceable to TUV Rheinland: +/- 2% (TUV Power controlled)

\*STC: 1000W/m<sup>2</sup>, 25°C, AM 1.5

## PERFORMANCE AT 800 W/m<sup>2</sup>, NOCT, AM 1.5

		SW 240	SW 245	SW 250	SW 255
Maximum power	$P_{max}$	174.2 Wp	176.4 Wp	180.4 Wp	182.6 Wp
Open circuit voltage	$U_{oc}$	33.7 V	33.7 V	33.9 V	33.8 V
Maximum power point voltage	$U_{mpp}$	27.4 V	27.7 V	27.8 V	27.8 V
Short circuit current	$I_{sc}$	6.80 A	6.84 A	6.96 A	7.04 A
Maximum power point current	$I_{mpp}$	6.37 A	6.37 A	6.50 A	6.56 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m<sup>2</sup>, 95% (+/-2%) of the STC efficiency (1000 W/m<sup>2</sup>) is achieved.

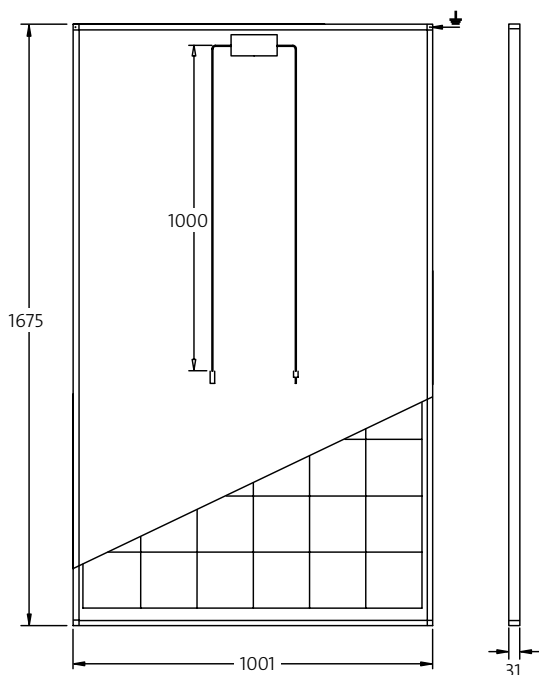

### DIMENSIONS

Length	1675 mm
Width	1001 mm
Height	31 mm
Frame	Clear anodized aluminum
Weight	21.2 kg

### COMPONENT MATERIALS

Cells per module	60
Cell type	Poly crystalline
Cell dimensions	156 mm x 156 mm
Front	4 mm tempered glass (EN 12150)

### THERMAL CHARACTERISTICS


NOCT	46 °C
$TC I_{sc}$	0.081 %/K
$TC U_{oc}$	-0.37 %/K
$TC P_{mpp}$	-0.45 %/K

### ADDITIONAL DATA

Power sorting	-0 Wp / +5 Wp
J-Box	IP65
Connector	MC4 / KSK4

### PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Maximum system voltage SC II	1000 V
Maximum reverse current	16 A
Load / dynamic load	5.4 / 2.4 kN/m <sup>2</sup>
Number of bypass diodes	3
Operating range	-40 °C to +85 °C

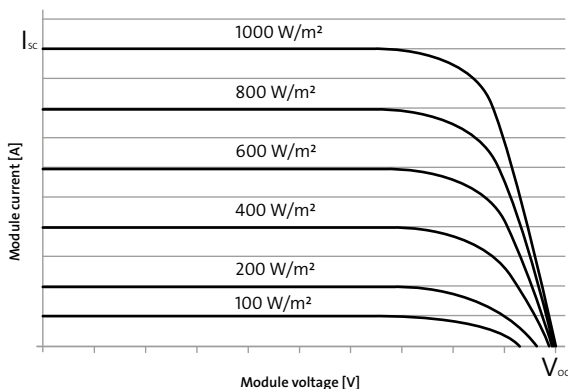

Ammonia resistance tested



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection
- Power Controlled



Your Local Dealer:

**SunFields Europe**

C/Lope Gomez de Marzoa - FEUGA12 - 15705 - Santiago de Compostela - Spain

Phone: 0034 981 59 58 56 - Email: info@sfe-solar.com - www.sfe-solar.com

SolarWorld AG reserves the right to make specification changes without notice. This data sheet complies with the requirements of EN 50380.

1) UL listing depending on the market.